

DATA SHEET

4158-A



SURFACE MOUNT INDUCTOR

FEATURES:


- SURFACE MOUNT
- PACKED IN TRAYS
- FOR PICK AND PLACE

ELECTRICAL SPECIFICATIONS:

- INDUCTANCE: 900 nHy @ NO LOAD
540 nHy @ 18 AMPS
- MAXIMUM CURRENT: 20 AMPS

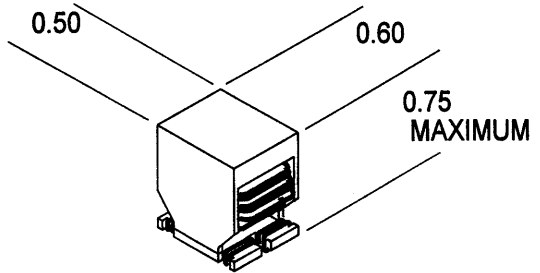

SCHEMATIC

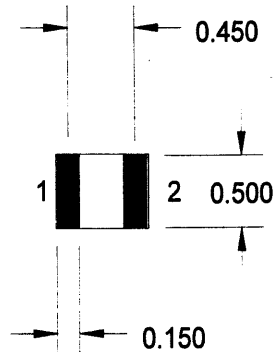

P.C. BOARD PATTERN

MODEL NAME: INDUCTOR	
SPECIFICATION: 900 nHy @ NO LOAD	
PACKAGING: TRAYS	
MATERIAL: 40% GLASS FILLED PHENOLIC	
PAGE: 1 of 1	UNITS: INCHES
TOLERANCE: ±.01 / ±.005 / ±1°	
U.L. REC.: 94V-0	
SIGNATURE: <i>R.E. Perry</i>	
REVISION DATE: 9/11/98	

GB INTERNATIONAL
 1408 AIRPORT ROAD
 ENDICOTT N.Y. 13760
 PHONE: (607)785-0938
 FAX : (607)785-1109
 E-MAIL : GBI@gbint.com

